



ELAC is proud to be ISO 9001 certified.
It's a true basis for efficient quality management.

AWARDS IN 2022



ELAC



A Journey
Together
Through the
Life of Sound.

ELAC



TABLE OF CONTENTS

CONCENTRO Page 08	CARINA SERIES Page 26	4 PI PLUS.2 Page 44
CONCENTRO M Page 10	UNI-FI 2.0 SERIES Page 28	WS SERIES Page 46
CONCENTRO S Page 12	UNI-FI REFERENCE SERIES Page 30	MIRACORD SERIES Page 50
NAVIS SERIES Page 14	DEBUT 2.0 SERIES Page 32	ALCHEMY SERIES Page 52
VELA SERIES Page 16	DEBUT REFERENCE SERIES Page 36	DISCOVERY SERIES Page 54
LINE 300 Page 18	SUBWOOFERS Page 38	ACCESSORIES & MERCHANDISE Page 56
SOLANO SERIES Page 22	CINEMA SETS Page 42	



CATEGORIES

LOUDSPEAKERS Page 8 – 47	ELECTRONICS Page 52 – 55
ACTIVE LOUDSPEAKERS Seite 14 – 15, 38 – 39	ACCESSORIES Page 56 – 59
CINEMA SETS Page 42 – 43	
TURNTABLES Page 50 – 51	



Technical Specifications



Product Videos and Instructions



Glossary



CONCENTRO

The Ultimate Statement.

The whole is greater than the sum of its parts. The ELAC Concentro demonstrates this convincingly. It is the ultimate ELAC loudspeaker in every respect.

- Coaxial Driver with VX Technology
- Award-winning JET 5 Tweeter
- AS-XR Technology in Midrange and Low/Midrange drivers
- AS Technology in the Woofer
- Push-Push/Pull-Pull Technology
- Bi-Wiring/Bi-Amping



Creating.
Audio.
Excellence.

ELAC

CONCENTRO

Color:
H x W x D: 168,0 x 46,0 x 61,0 cm
Weight: 145 kg
Recom. amp. pwr.: 80 – 600 W/channel
Impedance: 4 Ω
Frequency response: 18 – 50000 Hz

CONCENTRO

Accessories: Bi-Wiring Bridge Set,
Gloves,
Transport Aid,
Mounting Set,
Spike Set





Designs (high-gloss finish)



Optional

Macassar or Carbon Panels



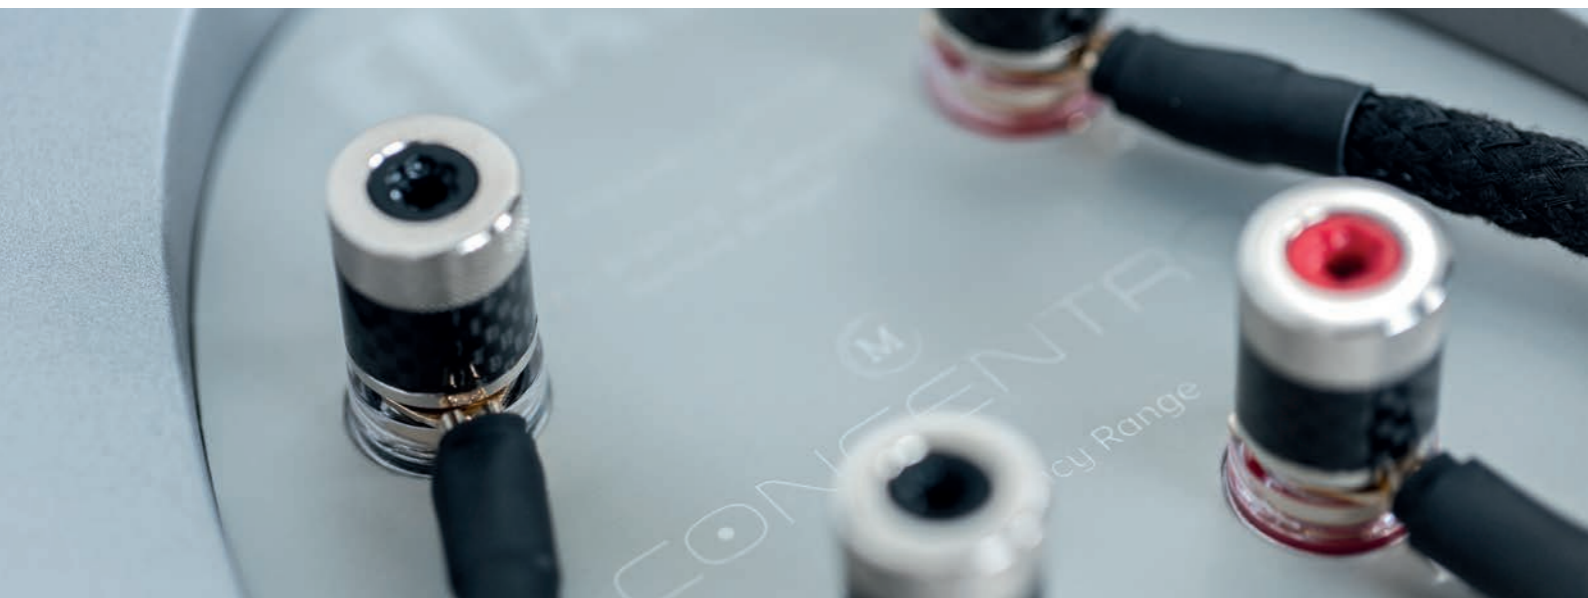

CONCENTRO M

Medium Meets Magic.

The Concentro M displays characteristic Concentro design cues but creates its own unique sonic and visual impact. Despite its slightly more compact dimensions, every aspect of its performance is on a grand scale.

- Coaxial driver with VX Technology
- Award-winning JET 5 Tweeter
- AS Technology in the Woofer
- AS-XR Technology in the Midrange Driver
- Push-Push/Pull-Pull Technology
- Bi-Wiring/Bi-Amping



CONCENTRO M

Color: ○ ●
H x W x D: 145,0 x 40,6 x 53,5 cm
Weight: 90 kg
Recom. amp. pwr.: 80 – 500 W/channel
Impedance: 4 Ω
Frequency response: 24 – 50000 Hz

CONCENTRO M

Accessories: Bi-Wiring Bridge Set,
 Gloves,
 Mounting Set,
 Spike Set



Designs (high-gloss finish)



Optional

Macassar or Carbon Panels





CONCENTRO S

S Means Superior.

The dream that inspires. The idea that drives progress. The love of detail that creates magic. The ELAC Concentro S Series is a piece of artistry made to let you enjoy music with all senses.

- Coaxial stepX-JET is the Acoustic Centerpiece
- Compact JET 5c Tweeter
- AS-XR Technology
- Exchangeable DCRs (Directivity Control Rings) allow acoustic adjustment (optimization)
- Convex shaped Baffle
- Bi-Wiring/Bi-Amping



CONCENTRO S 509

Color: ○ ● ●
H x W x D: 134,0 x 32,5 x 46,0 cm
Weight: 42,8 kg
Recom. amp. pwr.: 60 – 500 W/channel
Impedance: 4 Ω
Frequency response: 22 – 50000 Hz
Accessories: Bi-Wiring Bridge Set, Gloves, Spike Set, 3 x DCR



CONCENTRO S 507

Color: ○ ●
H x W x D: 120,0 x 27,0 x 38,0 cm
Weight: 36,8 kg
Recom. amp. pwr.: 60 – 500 W/channel
Impedance: 4 Ω
Frequency response: 26 – 50000 Hz
Accessories: Bi-Wiring Bridge Set, Gloves, Spike Set, 3 x DCR



CONCENTRO S 503

Color: ○ ● ●
H x W x D: 40,0 x 22,5 x 37,2 cm
Weight: 13,4 kg
Recom. amp. pwr.: 60 – 500 W/channel
Impedance: 4 Ω
Frequency response: 34 – 50000 Hz
Accessories: Bi-Wiring Bridge Set, Gloves, Spike Set, 3 x DCR



CONCENTRO CENTER

Color: ○ ●
H x W x D: 22,0 x 89,0 x 30,5 cm
Weight: 23 kg
Recom. amp. pwr.: 60 – 500 W/channel
Impedance: 4 Ω
Frequency response: 26 – 50000 Hz
Accessories: Bi-Wiring Bridge Set, Gloves, 3 x DCR




Designs (high-gloss finish)



Optional

Speaker Stand LS 100





NAVIS SERIES

Fully Active, Elegant and Breathtaking.

The Navis active speaker series is the perfect navigator in your quest for musical treasure. Navis never ceases to inspire with its transparent delivery and musicality.

- Stylish Design Language with trapezoid basic Shape
- Characteristic bottom plate made of die-cast aluminum
- Coaxial midrange/tweeter system
- Powerful BASH and conventional Class A/B Amplifiers, 300 Watts
- Analog Switch Design for Personal Sound Optimization
- AirX² Technology



NAVIS ARF-51

Color: ○ ●
H x W x D: 102,5 x 18,9 x 24,0 cm
Weight: 21 kg
Recom. amp. pwr.: 300 W
Frequency response: 43 – 28000 Hz
Accessories: Spike Set, Base Plate

NAVIS ARB-51

Color: ○ ●
H x W x D: 34,5 x 18,9 x 24,0 cm
Weight: 8,1 kg
Recom. amp. pwr.: 300 W
Frequency response: 44 – 28000 Hz

DISCOVERY CONNECT

Color: ●
H x W x D: 3,5 x 19,5 x 10,0 cm
Weight: 0,4 kg
Room correction: ABC (Auto Blend & Calibrate)
End-Point f. Standards: Discovery, Room Ready, Spotify Connect, AirPlay, Bluetooth
Max bitrate/resolution: 192 kHz / 24-bit
Outputs: analog, digital and AirX²




Designs (high-gloss finish)



Optional

NAVIS TRANSMITTER AIR-X²,
 Discovery Connect, Speaker Stand LS 80,





VELA SERIES

Breathtaking Design, Remarkable Lifestyle.

Their outstanding style meets the highest standards of contemporary interior design. However, they also let you experience music with all the senses. The VELA Series loudspeakers are more than just state of the art. They are also characterful performers.

- High-gloss Lacquer or real Wood Veneer
- Trapezoid Cabinets that are angled rearward
- JET 5 Tweeter with optimized Waveguide
- AS-XR Technology
- Van den Hul internal Wiring
- Bi-Wiring/Bi-Amping



VELA FS 409

Color: ○ ● ●
H x W x D: 130,7 x 27,6 x 33,2 cm
Weight: 32,1 kg
Recom. amp. pwr.: 40 – 450 W/channel
Impedance: 4 Ω
Frequency response: 28 – 50000 Hz
Accessories: Base Plate, Bi-Wiring Bridge Set, Spike Set



VELA FS 408

Color: ○ ●
H x W x D: 114,2 x 27,6 x 33,2 cm
Weight: 27,1 kg
Recom. amp. pwr.: 40 – 400 W/channel
Impedance: 4 Ω
Frequency response: 28 – 50000 Hz
Accessories: Base Plate, Bi-Wiring Bridge Set, Spike Set



VELA FS 407

Color: ○ ● ●
H x W x D: 100 x 22,9 x 26,6 cm
Weight: 19,1 kg
Recom. amp. pwr.: 40 – 300 W/channel
Impedance: 4 Ω
Frequency response: 30 – 50000 Hz
Accessories: Base Plate, Bi-Wiring Bridge Set, Spike Set



VELA BS 404

Color: ○ ● ●
H x W x D: 41,2 x 27,6 x 33,2 cm
Weight: 9,7 kg
Recom. amp. pwr.: 40 – 200 W/channel
Impedance: 4 Ω
Frequency response: 38 - 50000 Hz
Accessories: Bi-Wiring Bridge Set



VELA BS 403

Color: ○ ● ●
H x W x D: 36,2 x 19,1 x 24,0 cm
Weight: 7,1 kg
Recom. amp. pwr.: 40 – 200 W/channel
Impedance: 4 Ω
Frequency response: 41 – 50000 Hz
Accessories: Bi-Wiring Bridge Set



VELA CC 401

Farbe: ○ ● ●
H x B x T: 19,1 x 65,3 x 23,3 cm
Gewicht: 11,8 kg
Empf. Verstärkerlsg: 40 – 250 W/channel
Impedanz: 4 Ω
Frequenzgang: 32 – 50000 Hz
Accessories: Bi-Wiring Bridge Set


Designs (high-gloss finish)



Optional

Magnetically held Grilles,
 Speaker Stand LS 60, Bassreflex Plugs



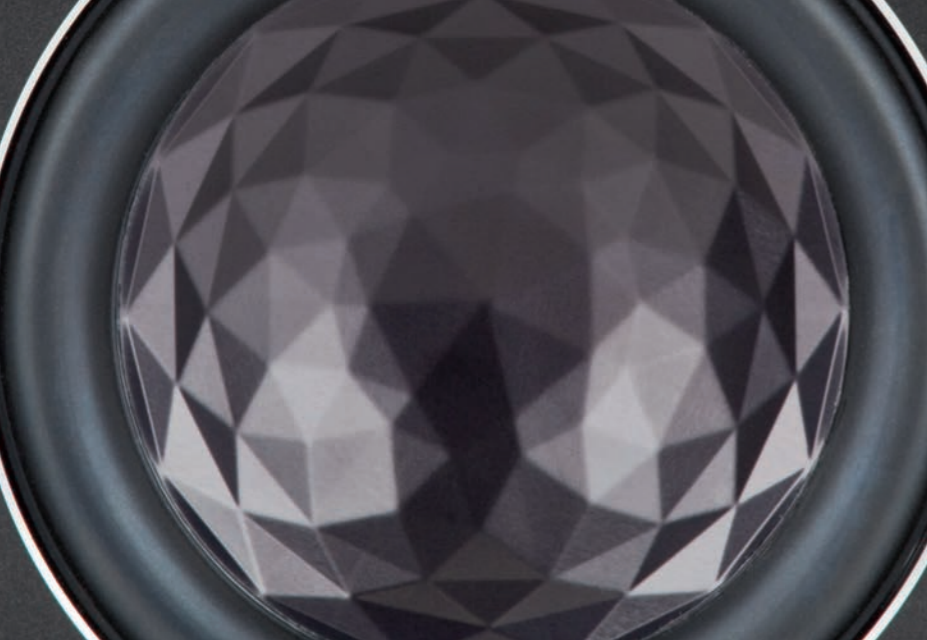

BS 312	BS 302	BS 302 WALL BRACKET
Color: ○ ●	Color: ○ ●	Color: ●
H x W x D: 20,8 x 12,3 x 28,2 cm	H x W x D: 12,1 x 9,1 x 11,1 cm	Features: Swivelling, Inclinal, Optional available
Weight: 7,2 kg	Weight: 1,3 kg	
Recom. amp. pwr.: 50 – 150 W/channel	Recom. amp. pwr.: 20 – 120 W/channel	
Impedance: 4 Ω	Impedance: 4 Ω	
Frequency response: 42 – 50000 Hz	Frequency response: 80 – 35000 Hz	
Accessories: Metal Grilles	Accessories: Metal Grilles	



LINE 300

No Reason to Hide.

When the original ELAC Elegant loudspeaker first filled the room with sound more than 25 years ago, listeners closed their eyes and lost themselves in the music. What felt like a fleeting moment was the start of an amazing success story.

- Compact Loudspeaker; Big Performance
- Aluminum Cabinets with a high-gloss lacquered Finish
- Minimized Front Baffle for maximum Dispersion
- JET 5 Tweeter
- AS-XR Technology
- Powerful Magnet System

Designs (high-gloss finish)



Optional

Speaker Stand LS 60, Mounting plate





Passion.
Performance.
Craftsmanship.

ELAC



SOLANO SERIES

Your Style, Your Loudspeaker, Your Music.

The Solano Series is made for you. With looks that fit your lifestyle of today and tomorrow. It also delivers timeless sound: open, accurate, with depth and character ... a true all-rounder.

- Timeless, Subtle Design
- Premium Materials
- JET 5 Tweeter
- AS Technology
- Performance Artists
- Bi-Wiring/Bi-Amping



SOLANO FS 287

Color:
H x W x D: 98,5 x 26,0 x 30,0 cm
Weight: 19 kg
Recom. amp. pwr.: 40 – 300 W/channel
Impedance: 4 Ω
Frequency response: 30 – 50000 Hz
Accessories: Bi-Wiring Bridge Set, Crossbar, Spike Set

SOLANO BS 283

Color:
H x W x D: 33,1 x 19,0 x 24,8 cm
Weight: 8 kg
Recom. amp. pwr.: 40 – 200 W/channel
Impedance: 4 Ω
Frequency response: 41 – 50000 Hz
Accessories: Bi-Wiring Bridge Set

SOLANO CC 281

Color:
H x W x D: 19,0 x 50,0 x 24,8 cm
Weight: 12 kg
Recom. amp. pwr.: 40 – 250 W/channel
Impedance: 4 Ω
Frequency response: 34 – 50000 Hz
Accessories: Bi-Wiring Bridge Set




Designs (high-gloss finish)



Optional

Magnetically held Grilles,
 Speaker Stand LS 60,
 Bassreflex Plugs





Innovation
and Tradition
Combined
in One.

ELAC



CARINA FS 247.4

Color:
 H x W x D: 107,0 x 24,0 x 24,5 cm
 Weight: 19 kg
 Recom. amp. pwr.: 30 – 250 W/channel
 Impedance: 6 Ω
 Frequency response: 34 – 30000 Hz
 Accessories: Bi-Wiring Bridge Set, Crossbar, Spike Set

CARINA BS 243.4

Color:
 H x W x D: 31,9 x 21,6 x 23,5 cm
 Weight: 7 kg
 Recom. amp. pwr.: 30 – 150 W/channel
 Impedance: 6 Ω
 Frequency response: 46 – 30000 Hz
 Accessories: Bi-Wiring Bridge Set

CARINA CC 241.4

Color:
 H x W x D: 20,5 x 62,0 x 24,0 cm
 Weight: 12 kg
 Recom. amp. pwr.: 30 – 200 W/channel
 Impedance: 6 Ω
 Frequency response: 50 – 30000 Hz
 Accessories: Bi-Wiring Bridge Set

CARINA SERIES

Distinctive & Elegant.

The fresh look of satin lacquered cabinets and the extraordinary sound are the ingredients of a new ELAC classic. With its striking yet elegant design, the Carina Series delivers thrilling, powerful and dynamic sound.

- Satin Finish
- Meticulously Designed Crossover
- Air Motion Transformer, folded according to the JET Principle
- Exceptional Musicality and Dynamics
- Woofer with Aluminum Diaphragm
- Bi-Wiring/Bi-Amping



Designs (silk matt lacquer finish)



Optional

Magnetically held Grilles,
 Speaker Stand LS 60,
 Bassreflex Plugs





UF52	UB52	UC52
Color: ●	Color: ●	Color: ●
H x W x D: 98 x 18,5 x 27,5 cm	H x W x D: 34,6 x 18,5 x 27,5 cm	H x W x D: 18,5 x 54,4 x 27,5 cm
Weight: 17,8 kg	Weight: 7,8 kg	Weight: 11,2 kg
Recom. amp. pwr.: 40 – 140 W/channel	Recom. amp. pwr.: 40 – 140 W/channel	Recom. amp. pwr.: 40 – 140 W/channel
Impedance: 6 Ω	Impedance: 6 Ω	Impedance: 6 Ω
Frequency response: 42 – 35000 Hz	Frequency response: 46 – 35000 Hz	Frequency response: 48 – 35000 Hz
Accessories: Grilles, Crossbar	Accessories: Grilles	Accessories: Grilles



Uni-Fi 2.0

A New Chapter in Coherent Sound.

New look for a familiar face – the Uni-Fi 2.0 proves beyond doubt that a leap forward is always a good idea. More life, more impact, more Uni-Fi – meet Uni-Fi 2.0.

- Concentric Midrange/Tweeter Driver
- Consistent Sound Quality at all Listening Positions
- Silk Dome Tweeter
- High Material and Manufacturing Standards for perfect Attention to Detail
- Internally Braced Cabinets
- Front Facing Bassreflex Ports (UB52 & UC52)




Designs (Vinyl finish)



Optional

Bassreflex Plugs



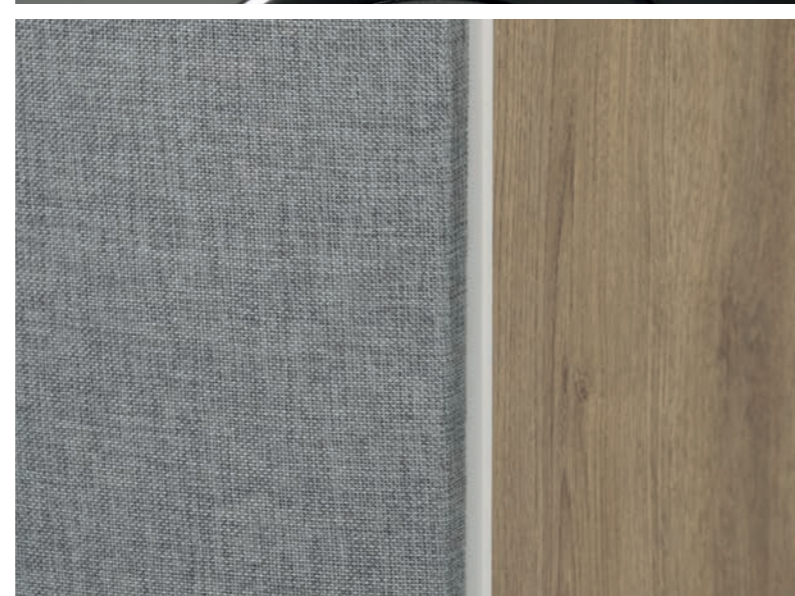

UFR52	UBR62	UCR52
Color:	Color:	Color:
H x W x D: 99,5 x 23,4 x 33,8 cm	H x W x D: 35,9 x 20,8 x 33,4 cm	H x W x D: 18,5 x 52,7 x 33,4 cm
Weight: 19,4 Kg	Weight: 9,6 Kg	Weight: 12,2 Kg
Recom. amp. pwr.: 140 W/channel	Recom. amp. pwr.: 140 W/channel	Recom. amp. pwr.: 140 W/channel
Impedance: 6 Ω	Impedance: 6 Ω	Impedance: 6 Ω
Frequency response: 40 – 35000 Hz	Frequency response: 41 – 35000 Hz	Frequency response: 47 – 35000 Hz
Accessories: Magn. held Grilles, Bi-Wiring Bridge Set, Crossbar, Spike Set	Accessories: Magn. held Grilles, Bi-Wiring Bridge Set	Accessories: Magn. held Grilles, Bi-Wiring Bridge Set

Uni-Fi REFERENCE

High Score and New Reference.

The Uni-Fi Series has been carefully refined. Following the great success of the first Uni-Fi Series and its successor, Uni-Fi 2.0, we now present the Uni-Fi Reference Series. This series elevates the concept of the Uni-Fi Series to a new level.

- Contemporary Design in two color Variants
- Magnetically attached Grilles
- Proven Uni-Fi Technology
- Concentric Midrange/Tweeter Chassis
- Dual Flared Bassreflex Ports
- Bi-Wiring/Bi-Amping





Designs (silk matte and wood vinyl finish)



Optional

Bassreflex Plugs



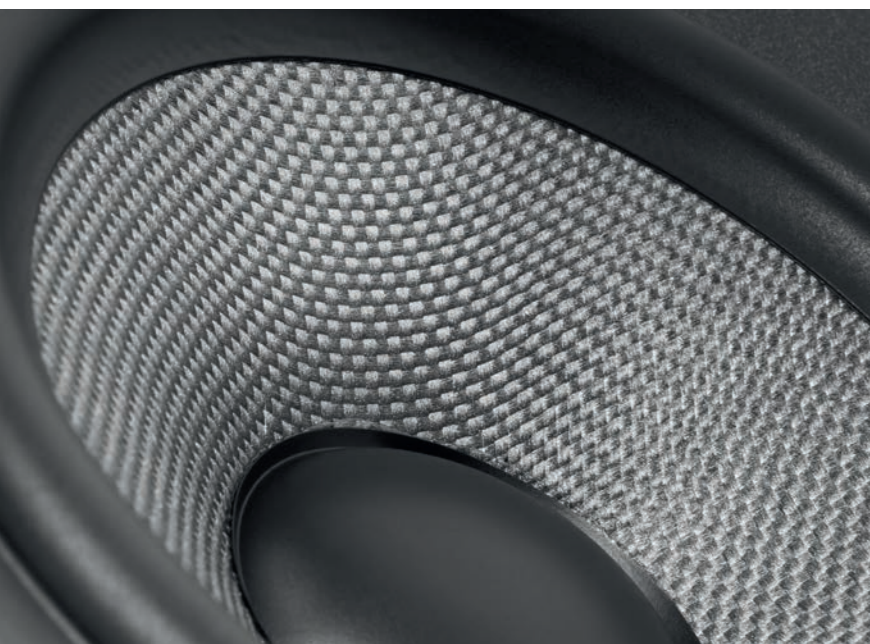

DEBUT 2.0

Exceeds Expectations Every Time.

Acclaimed all over the world, the ELAC Debut Series has been writing history for many years. The Debut 2.0 marks a new chapter in this success story. Offering significantly improved sound performance, the ELAC Debut 2.0 Series remains a genuine all-round talent.

- Newly Developed Drivers
- Newly Designed Waveguides
- Redesigned Cabinet
- Reconfigured Crossovers
- Silk Dome Tweeter
- Extended Low-Frequency Response



Debut F6.2

Color: ●
H x W x D: 109,7 x 19,5 x 26,6 cm
Weight: 19,9 kg
Recom. amp. pwr.: 30 – 150 W/channel
Impedance: 6 Ω
Frequency response: 39 – 35000 Hz
Accessories: Grilles, Spike Set

Debut F5.2

Color: ●
H x W x D: 101,6 x 18,0 x 23,4 cm
Weight: 15,7 kg
Recom. amp. pwr.: 20 – 140 W/channel
Impedance: 6 Ω
Frequency response: 42 – 35000 Hz
Accessories: Grilles, Spike Set

Debut A4.2

Color: ●
H x W x D: 12,5 x 18,0 x 23,4 cm
Weight: 2,5 Kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 8 Ω
Frequency response: 180 – 2000 Hz



Debut C6.2

Color: ●
H x W x D: 19,3 x 53,9 x 26,6 cm
Weight: 10,5 kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 8 Ω
Frequency response: 55 – 35000 Hz
Accessories: Grilles

Debut C5.2

Color: ●
H x W x D: 18,0 x 54,0 x 22,0 cm
Weight: 8,8 kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 8 Ω
Frequency response: 55 – 35000 Hz
Accessories: Grilles



Construction of the tweeter driver of the Debut 2.0 Series.

Designs (black ash vinyl finish)



Optional

Bassreflex Plugs





Debut B6.2

Color: ●
H x W x D: 37,5 x 19,5 x 26,6 cm
Weight: 8,3 kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 6 Ω
Frequency response: 44 – 35000 Hz
Accessories: Grilles

Debut B5.2

Color: ●
H x W x D: 34,1 x 18,0 x 23,4 cm
Weight: 5,6 kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 6 Ω
Frequency response: 46 – 35000 Hz
Accessories: Grilles

Debut OW4.2

Color: ●
H x W x D: 32,4 x 20,0 x 10,0 cm
Weight: 4,2 kg
Recom. amp. pwr.: 20 – 80 W/channel
Impedance: 6 Ω
Frequency response: 70 – 35000 Hz
Accessories: Grilles,
Mounting Set



Debut SUB 3030

Color: ●
H x W x D: 46,2 x 44,8 x 44,8 cm
Weight: 22,8 kg
Max. Amp. pwr.: 500 W
Accessories: BLE Control App for
iOS & Android

Debut SUB 3010

Color: ●
H x W x D: 36,4 x 34,3 x 34,3 cm
Weight: 14,6 kg
Max. Amp. pwr.: 200 W
Accessories: BLE Control App for
iOS & Android

Debut S10.2

Color: ●
H x W x D: 34,3 x 34,3 x 34,3
Weight: 12 kg
Max. Amp. pwr.: 100 W

ELAC SUB-Control 2.0





DEBUT REFERENCE

Debut at the Highest Level.

Reference is not just part of the name! It is the defining characteristic of exclusive products that offer even better performance and premium design features. The Debut Reference Series is a logical evolutionary step based on new, creative impulses and the successful Debut 2.0 Series.

- Wood-effect vinyl in two color combinations
- Painted front baffle with magnetically attached grilles
- Elaborate cabinet structure
- Silk Dome Tweeter with Waveguide
- Die-cast Aluminum Woofer Chassis for improved Stiffness
- Optimized sound




DFR52

Color: 
H x W x D: 101,6 x 18,5 x 24,2 cm
Weight: 16,7 kg
Recom. amp. pwr.: 30 - 150 W/channel
Impedance: 6 Ω
Frequency response: 42 – 35000 Hz
Accessories: Magn. held Grilles

DBR62

Color: 
H x W x D: 35,9 x 20,8 x 27,5 cm
Weight: 8,2 kg
Recom. amp. pwr.: 30 - 150 W/channel
Impedance: 6 Ω
Frequency response: 42 – 35000 Hz
Accessories: Magn. held Grilles

DCR52

Color: 
H x W x D: 18,5 x 52,7 x 24,2 cm
Weight: 10,1 kg
Recom. amp. pwr.: 30 - 150 W/channel
Impedance: 6 Ω
Frequency response: 42 – 35000 Hz
Accessories: Magn. held Grilles



Designs (satin matte and wood vinyl finish)





ELAC JETMAN

The Great Sounding Adventure.





CONNEX DCB41

All in One – One for All!

ELAC's ConneX DCB41 is an active stereo speaker system designed to be connected to a variety of sources without additional equipment because of its versatile inputs.

- Active Stereo Speaker System
- Easy to Set Up
- Tremendous Bass Performance
- A Huge Variety of Inputs
- Four Finishes
- Lacquered Baffle



ConneX DCB41

Color: ● ● ● ●
H x B x T: 24,8 x 14,0 x 21,0 / 19,5 cm
Weight: 3,4 / 2,8 kg
Amplifier: 2 x 50 Watts
Outputs: Speaker Output, Subwoofer Output (RCA)

ConneX DCB41


Inputs: HDMI (eARC und CEC), Line / Phono (RCA), USB Audio (up to 96 kHz / 24 Bit), Digital (optical), Bluetooth APT-X,

ConneX DCB41

Accessories: Remote control, Batteries, Covering Frame, HDMI Cable, Speaker Cable, Power Cable, Self-Adhesive Rubber Feet



Designs (Cabinets with four vinyl finishes and a lacquered baffle)

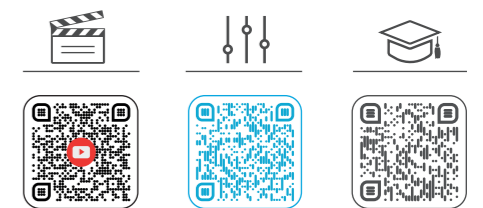



Founded in 1926 to pursue sonar technology,
ELAC's journey in sound
ultimately led to a passion for music -
The Life of Sound.

since **1926**



CINEMA SETS

Action!

Hear every spoken word, feel every moment, and get goose bumps – add life to your entertainment experience, enjoy incredibly realistic sound and explore the possibilities of the ELAC Cinema Sets.

- 5.1 Surround Setup
- Ultra-compact
- Exceptional Style
- For TV, Movies, Music and Gaming
- Powerful Low-Frequency Response
- Premium Feel



CINEMA 10.2 / SAT

Color: ●
H x W x D: 13,2 x 8,8 x 10,2
Weight: 1,3 Kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 6 Ω
Frequency response: 90 – 21000 Hz

CINEMA 10.2 / Debut S10.2

Color: ●
H x W x D: 34,3 x 34,3 x 34,3
Weight: 14,6 kg
Max. Amp. pwr.: 200 W

CINEMA 10.2 / SAT CENTER

Color: ●
H x W x D: 8,8 x 29,0 x 10,2
Weight: 2,0 Kg
Recom. amp. pwr.: 20 – 150 W/channel
Impedance: 6 Ω
Frequency response: 85 – 21000 Hz



CINEMA 30 / BS 302

Color: ○ ●
H x W x D: 12,1 x 9,1 x 11,1 cm
Weight: 1,3 kg
Recom. amp. pwr.: 20 – 120 W/channel
Impedance: 4 Ω
Frequency response: 80 – 35000 Hz
Accessories: Metal Grilles

CINEMA 30 / SUB 2030


Color: ○ ●
H x W x D: 35,6 x 30,0 x 31,5 cm
Weight: 14 kg
Max. Amp. pwr.: 350 W
Frequency response: 20 – 180 Hz

SUB 2030

The SUB 2030 can also be purchased as a stand-alone product.

Designs (eloxal, lacquer finish)



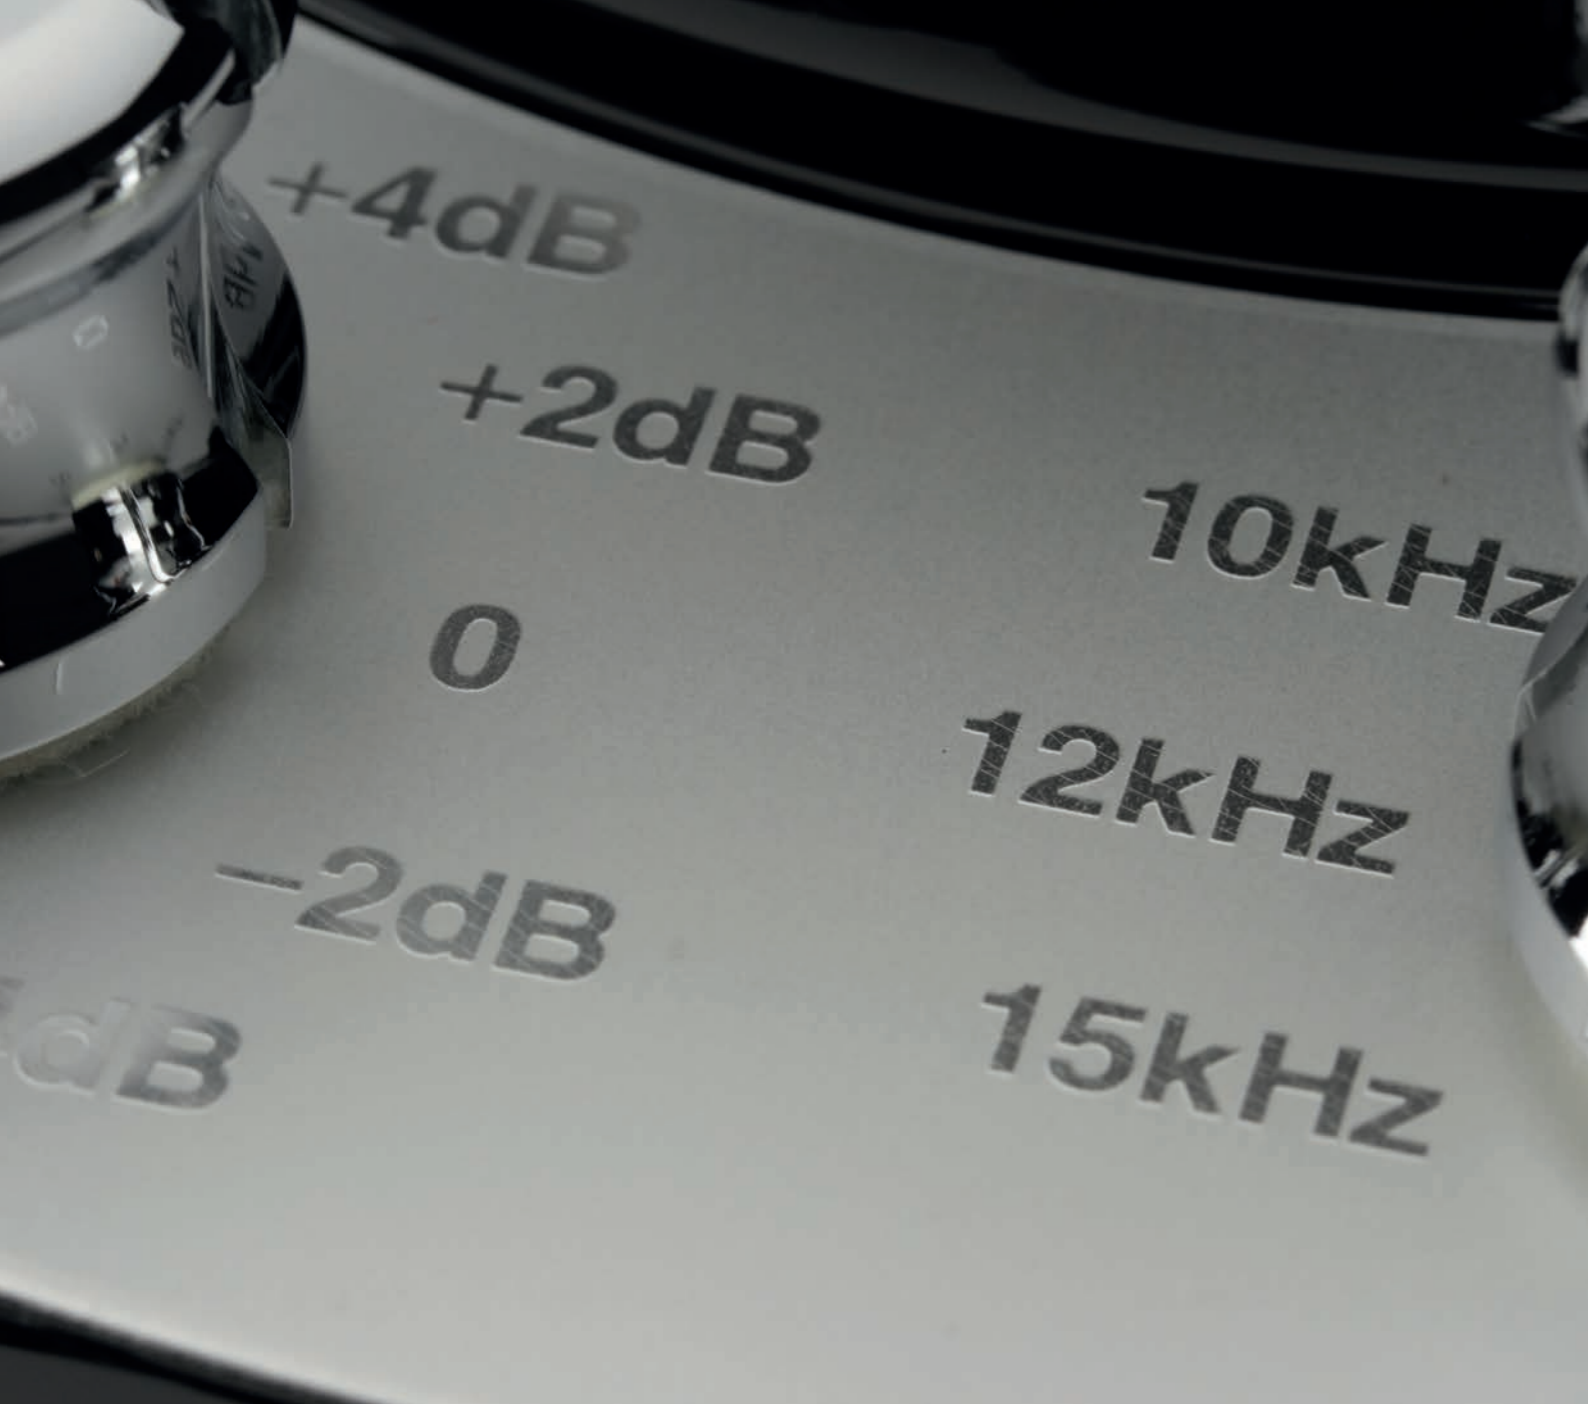

4 Pi PLUS.2

Incredible Airy Heights.


With the 4 Pi Plus.2, you'll experience something unique whenever you press play. Compared to conventional designs, the 4 Pi Plus.2 super-tweeter is omni-directional and adds the space behind the speakers to the soundstage. This creates room-filling sound accompanied by a silky and incredibly airy high-frequency performance that is simply unmatched.

- Extraordinary Design
- High-gloss Lacquered Aluminum Cabinet
- Room-filling Sound
- Extremely thin, knurled Aluminum Ribbon
- Flexible Adjustment Options
- The ideal Add-On for High-Quality Loudspeakers



4 Pi PLUS.2

Color: ●
 H x W x D: 14,3 x 15,0 x 25,0 cm
 Weight: 3,4 kg
 Recom. amp. pwr.: 20 – 400 W/channel
 Impedance: 6 Ω
 Frequency response: 3500 – 50000 Hz

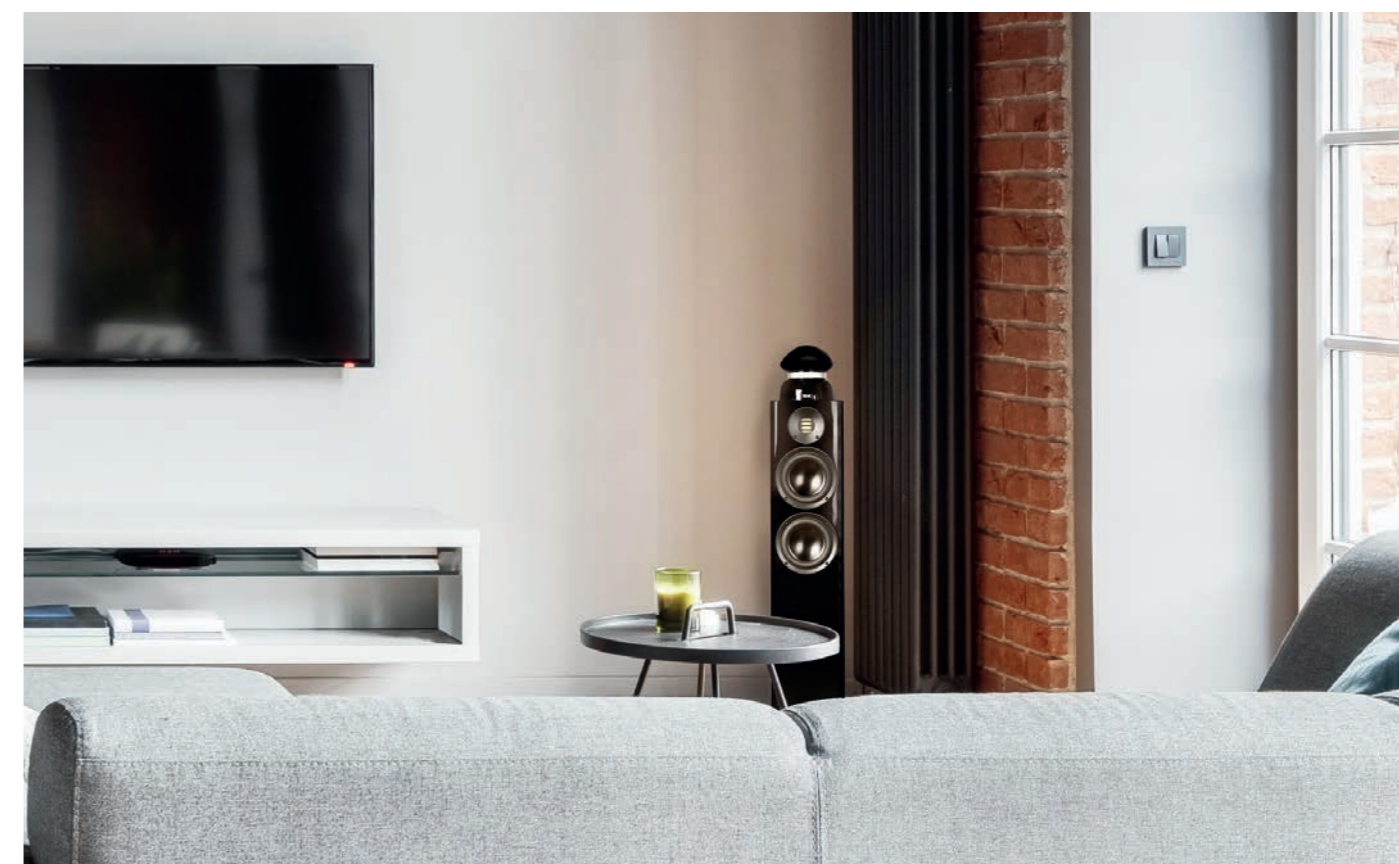

Designs (high-gloss finish)





WS SERIES

More On-Wall, more Leeway.

Elegant design; superior sound: the WS Series includes discrete and room-friendly wall-mounted speakers that deliver audiophile sound from your wall.

- Satin Finish
- Compact, Low-Profile Cabinets
- JET 5 Tweeter and AS-XR Technology in the WS 1600 Series
- Silk Dome Tweeter and AS Technology in the WS 1400 Series
- Easy to mount, Upright or Horizontally
- Extremely versatile



WS 1665

Color: ○ ●
H x W x D: 65,0 x 22,0 x 9,8 cm
Weight: 7,8 kg
Recom. amp. pwr.: 20 – 200 W/channel
Impedance: 4 Ω
Frequency response: 46 – 50000 Hz
Accessories: Two magn. held Grilles, Mounting Set



WS 1645

Color: ○ ●
H x W x D: 40,0 x 22,0 x 9,8 cm
Weight: 4,7 kg
Recom. amp. pwr.: 20 – 150 W/channel
Impedance: 4 Ω
Frequency response: 50 – 50000 Hz
Accessories: Two magn. held Grilles, Mounting Set



WS 1465

Color: ○ ●
H x W x D: 65,0 x 22,0 x 9,8 cm
Weight: 7,3 kg
Recom. amp. pwr.: 20 – 180 W/channel
Impedance: 4 Ω
Frequency response: 48 – 30000 Hz
Accessories: Two magn. held Grilles, Mounting Set



WS 1445

Color: ○ ●
H x W x D: 40,0 x 22,0 x 9,8 cm
Weight: 4,3 kg
Recom. amp. pwr.: 20 – 140 W/channel
Impedance: 4 Ω
Frequency response: 52 – 30000 Hz
Accessories: Two magn. held Grilles



WS 1425

Color: ○ ●
H x W x D: 22,0 x 22,0 x 9,8 cm
Weight: 2,5 kg
Recom. amp. pwr.: 20 – 100 W/channel
Impedance: 4 Ω
Frequency response: 70 – 35000 Hz
Accessories: Two magn. held Grilles



WS WALL CEILING BRACKET

Ceiling mounting sets are available for the entire WS Series.

WS Series can also be used for Atmos applications.

Designs (silk matt lacquer finish)




Optional

Ceiling mounting sets are available for the entire WS Series.



A JOURNEY TOGETHER
THROUGH THE LIFE OF SOUND



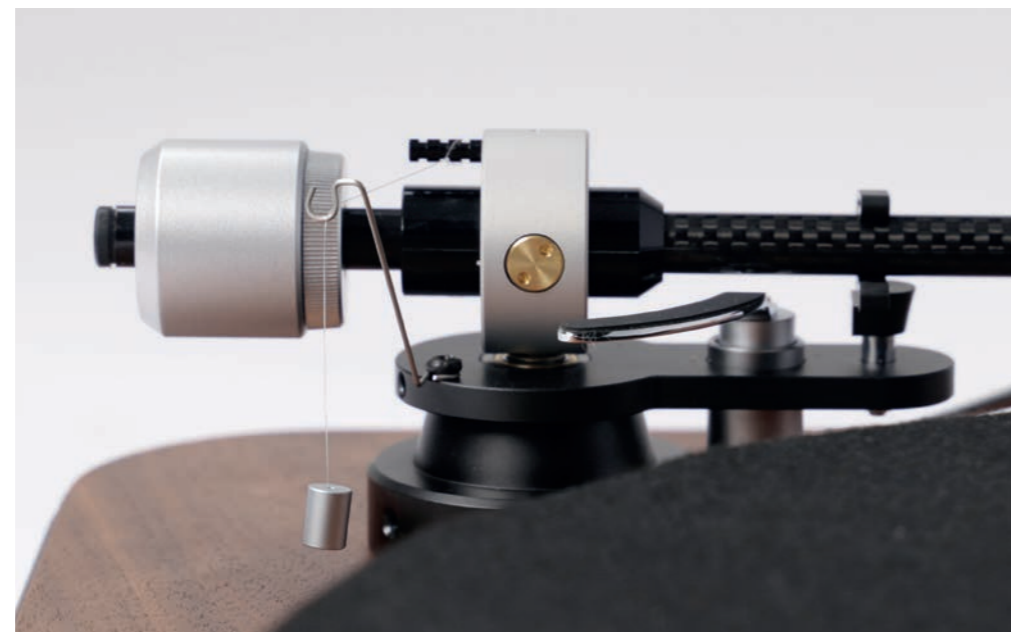

MIRACORD SERIES

Miracord Loves Vinyl, Vinyl Loves Miracord.

The year 2016 marked ELAC's exciting comeback to the world of vinyl with the Miracord 90 turntable as a tribute to the company's history. Since the company's 90th anniversary, ELAC has added more turntables that all share one thing in common: the perfect combination of excellent sound and high-quality design.

- Cutting-edge Design with High ELAC Recognition Value
- Solid Platter ensures exceptional Refinement
- Sophisticated Drive System for flawless Reproduction
- Premium Materials
- Precisely Balanced Tonearms
- Maximum Flexibility in Terms of Cartridge Choice



MIRACORD 80

Color: ● ●
H x W x D: 14,8 x 47,0 x 37,4 cm
Weight: 14,0 kg
Tonearm: Carbon tube
Drive: DC / belt drive
Specifics: Ingot drive with 5.6 kg heavy Aluminium Turntable

MIRACORD 60

Color: ●
H x W x D: 14,5 x 42,2 x 36,0 cm
Weight: 8,2 kg
Tonearm: Carbon tube
Drive: DC / belt drive
Specifics: Belt Drive, Mass Drive, incl. Dust Cover

MIRACORD 50

Color: ●
H x W x D: 14,0 x 42,0 x 36,0 cm
Weight: 5,5 kg
Tonearm: Aluminium tube
Drive: DC / belt drive
Specifics: Integrated Phono Amp, Dust Cover and AT91 syst. in the scope of delivery




For listening enjoyment



Optional

Miracord Phono Cable, MC 60 system KIT AT 95 for Miracord 60, Dust Cover and LMB Cable for Miracord 80





ALCHEMY SERIES

The Art of the Alchemists – Rediscovered.

The ELAC team has re-imagined the Alchemy Series from the ground up. Alchemy combines diverse technologies with exceptional quality to deliver a high-end sound experience.

- Fully Discrete Audio Stages
- Linear Power Supplies with Toroidal Transformers for Analog Precision
- Ultra-Low-Noise FET Gain Stages for Amplification and Equalization
- Numerous Inputs and Setting Options
- Compact, Timeless Design
- Analog Technology, DAC and Streaming at the very Highest Level



ALCHEMY DDP-2

Color: ●
H x W x D: 5,0 x 4,4 x 38 cm
Weight: 6,35 kg
Function: Preamplifier with DAC and streaming functionality
Features: Analog (sym. and unsym.) and digital inputs, PCM, DSD, DoP, Roon Ready, Spotify Connect, AirPlay



ALCHEMY PPA-2

Color: ●
H x W x D: 5,0 x 4,4 x 38 cm
Weight: 5,44 kg
Function: Phono preamp
Features: Two independent inputs, suitable for MM and MC, continuously adjustable input impedance, RCA and XLR outputs



ALCHEMY DPA-2

Color: ●
H x W x D: 5,0 x 4,4 x 38 cm
Weight: 6,35 kg
Function: Power amplifier
Max. Output power pro Channel: Stereo: 325 W/channel at 4 Ω, Mono: 625 W at 8 Ω

Power Amplifier

DPA-2



Phono Preamp

PPA-2



DAC / Preamp
Streamer

DDP-2



Designs (Eloxa)





DISCOVERY SERIES


Time to Discover.


Not just amplifying, but actively shaping something: The Discovery series amplifier is compact, well thought-out and powerful - a perfect partner for modern 2.0 or 2.1 systems.

- Convenient Control with free Apps
- AirPlay Technology
- A Variety of Digital and Analog Connections
- BASH Amplifier Technology
- Bluetooth Technology
- Subwoofer Output





DISCOVERY DS-A101-G

Color: 
H x W x D: 5,8 x 21,5 x 31,5 cm
Weight: 2 kg
End-Point f. Standards: Discovery, Spotify, Connect, AirPlay, Bluetooth, Roon-Ready, DLNA
Max bitrate/resolution: 192 kHz / 24 Bit

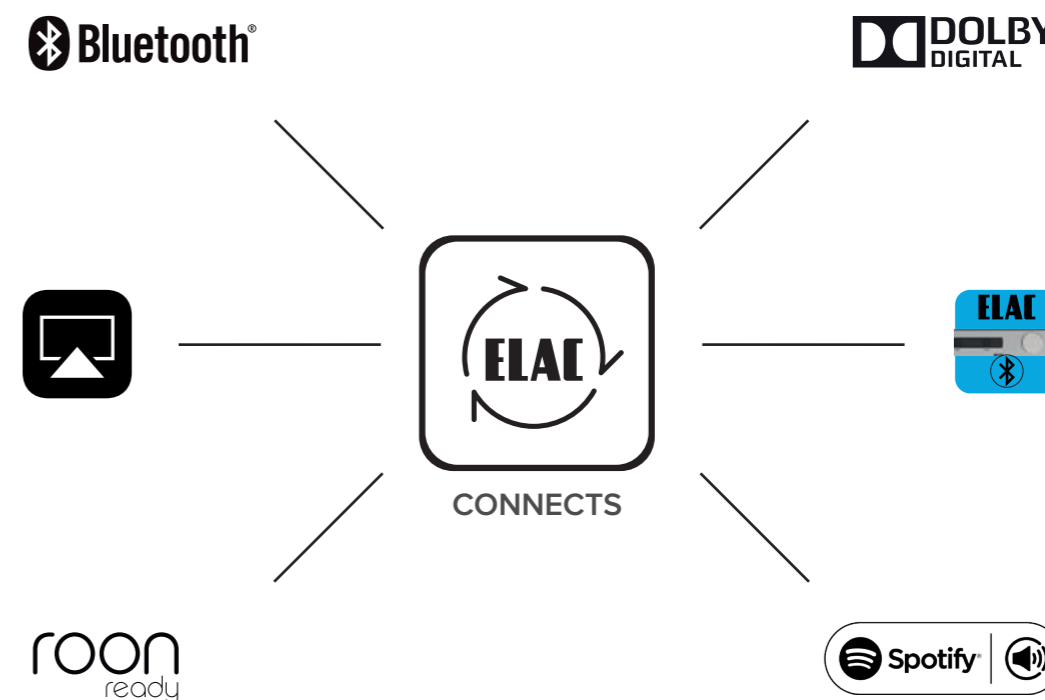

Designs (Brushed Aluminum)

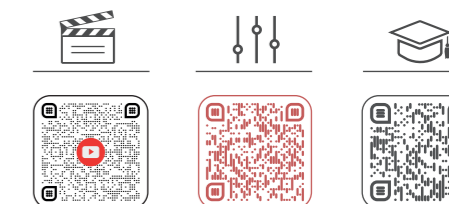



ACCESSORIES

The Perfect Add-Ons.

Our accessories offer a wide choice of speaker stands, cables or grilles to further enhance your ELAC experience.

- Speaker Stands
- Loudspeaker Cables
- Loudspeaker Grilles
- Navis Transmitter
- Spike Sets
- Ceiling Brackets



SPEAKER STAND LS 100

Color: ●
H x W x D: 68,5 x 29,5 x 40,0
Weight: 9,5 kg
Recommended for: CONCENTRO S 503 and CONCENTRO CENTER



SPEAKER STAND LS 80

Color: ●
H x W x D: 60,0 x 24,5 x 26,5
Weight: 7,0 kg
Recommended for: NAVIS



SPEAKER STAND LS 60


Color: ○ ●
H x W x D: 71,3 x 27,7 x 33,7 cm
Weight: 6,5 kg
Recommended for: VELA, SOLANO, CARINA and BS 312

LS 60 is available in Satin Black and White and White High Gloss.



Bass Reflex Plugs

Color: ●
ø / Sizes: 55/30 mm, 70/40 mm, 82/47 mm and 90/40 mm.

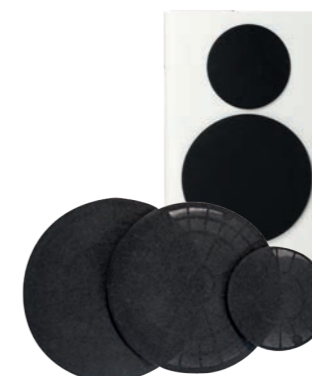

Grill Sets

Color: ●
Recommended for: VELA, SOLANO, CARINA



NAVIS TRANSMITTER AIR-X²TW-BK

Color: ●
H x W x D: 3,9 x 9,2 x 9,4 cm
Weight: 0,2 kg
Function: Wireless transmission of analog signals to NAVIS speakers





SENSIBLE SPEAKER CABLE SPwr.

Length: 3 or 4,5 m

REFERENCE SPEAKER CABLE SPwr.R

Length: 3 or 4,5 m

MIRACORD PHONO CABLE

Length: 1,8 m



LS 60 BS 312 MOUNTING PLATE

Function: Mounting Plate for screwing LS 60 and BS 312 together.


ULTIMATE SPIKE SET (M8 Thread)

Function: For the targeted coupling of loudspeaker to the subfloor, the avoidance of resonances and thus the acoustical enhancement.

WS CEILING BRACKET

Function: For overhead mounting of WS speakers on the ceiling or secured wall mounting.



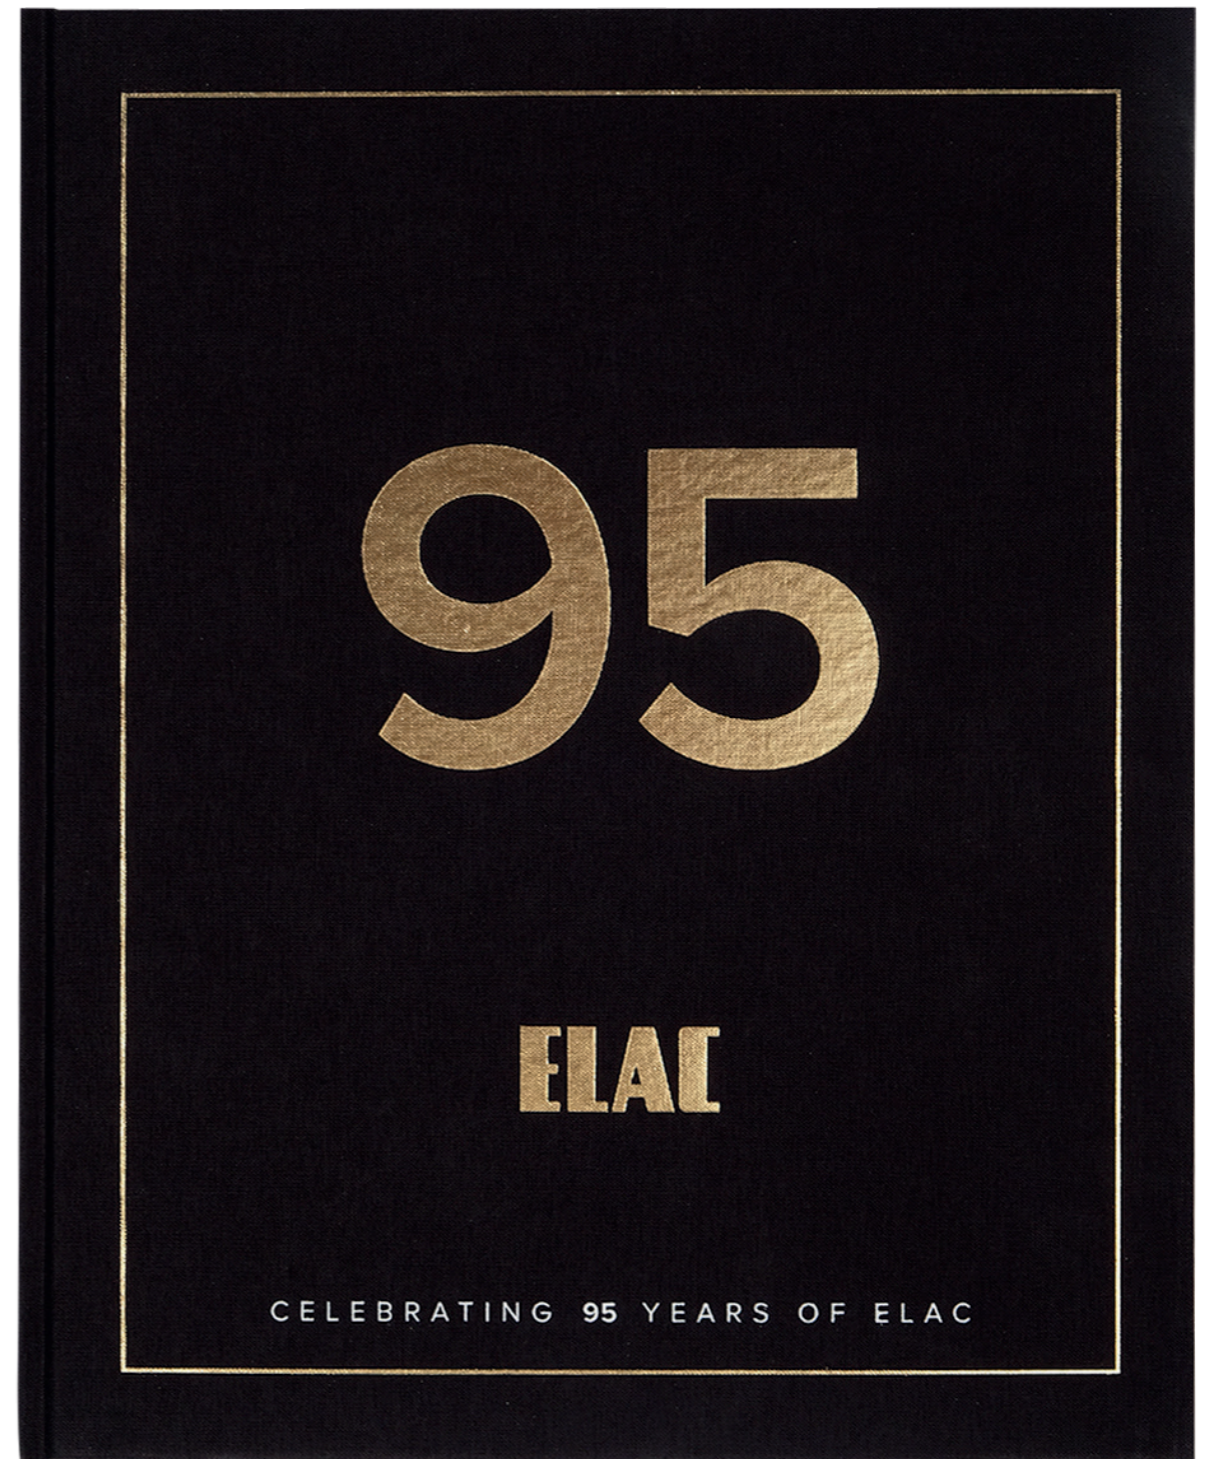

MERCHANDISING

ELAC and You

Want to take your ELAC experience beyond the world of sound? Enjoy "The Life of Sound" in every situation.

- T-shirts for Women
- Enamel Mug
- CD Celebrating 95 Years of Elac
- T-shirts for Men
- Anniversary Book
- LP Celebrating 95 Years of Elac





ELAC

The life of sound.



elac.com



Youtube



Facebook



Instagram



Size ratios are not shown in fixed scale and do not reflect real size ratios, please refer to the tables below the products for the relevant information.

Deviations in design, colours, errors and technical changes reserved. For technical details, please consult www.elac.com

iOS™ and iPhone™ are registered trademarks of Cisco Systems, Inc., USA, licensed to Apple Inc., USA.

Android™ is a registered trademark of Google Inc., USA.

Bluetooth™ is a registered trademark of Bluetooth Special Interest Group, USA.

Photos, image rights & authors:

Products: Marco Knopp - lichtundfeder.de, Genie & Wahnsinn oHG and Elac GmbH, Design and image processing: Genie & Wahnsinn oHG - We reserve the right to make mistakes or modifications. Page 9 @katharzina Bialasiewicz fotografhe.eu - stock.adobe.com, Page 11 ©Dariusz Jarzabek - stock.adobe.com, Page 15 ©2mmedia - stock.adobe.com, Page 21 ©Photographie.eu - stock.adobe.com, Page 23 ©Max Krasnov - stock.adobe.com, Page 25

©archideaphoto - stock.adobe.com,

Page 31 ©Nut - stock.adobe.com, Page 39 ©Dariusz Jarzabek -stock.adobe.com, Page 40 ©denisismagilov - stock.adobe. Page 50 ©denisismagilov - stock.adobe

